
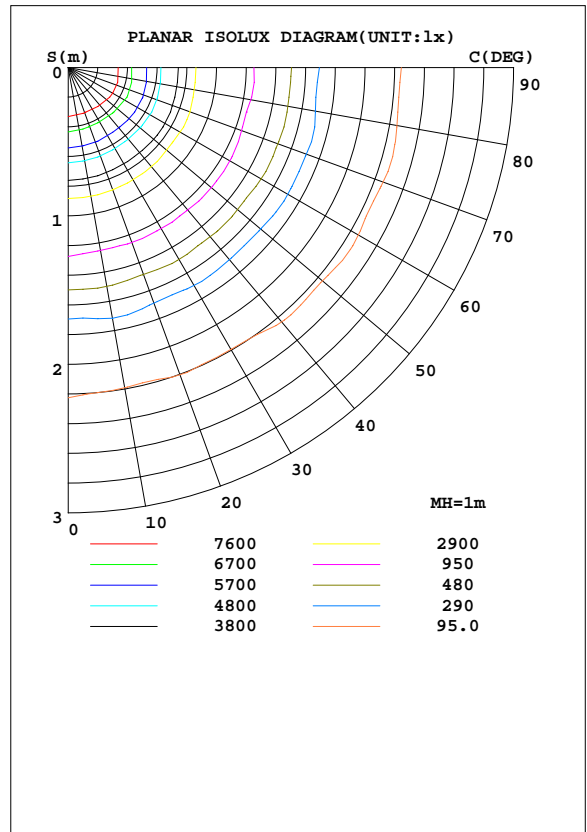


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:221.0V I:0.7125A P:153.4W PF:0.9741 Lamp Flux:21426.4x1 lm		
NAME: LED HIGH BAY LIGHT	TYPE:YHL-ID-150-HB-VE	WEIGHT:
SPEC.:MEAN WELL	DIM.: 5000K	SERIAL No.:20170316
MFR.:	SUR.:70Ra	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 139.69 lm/W			
MODEL	NF2W757GR-V1 318PCS	I <sub>max</sub> (cd)	9564	S/MH(C0/180)	1.25
NOMINAL POWER(W)	150	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	21426	η UP, DN(C0-180)	0.0, 49.6
NOMINAL FLUX(lm)	21426.4	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 50.4
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	100.0	CIBSE SHR MAX	1.35

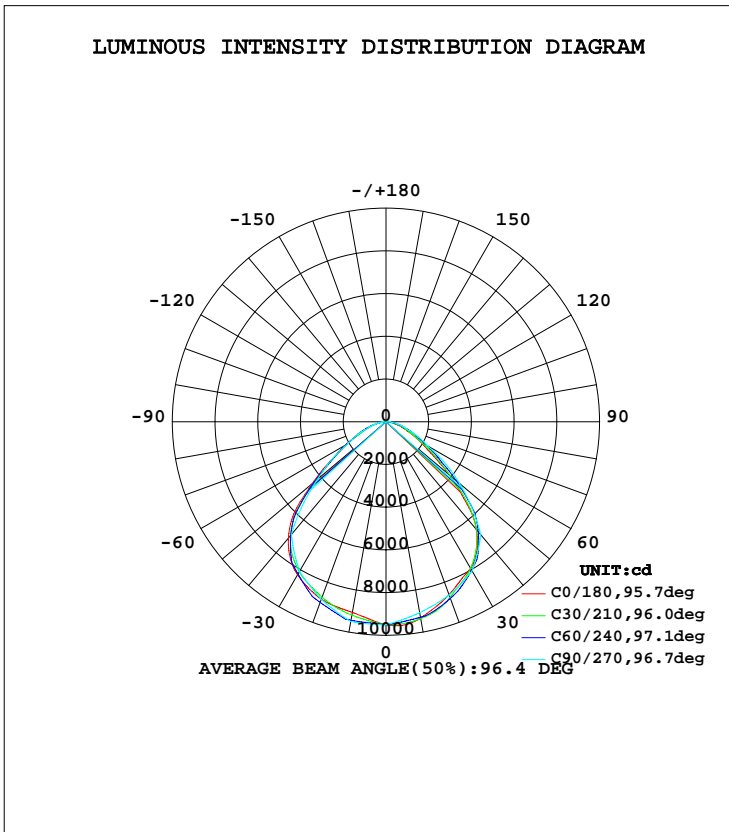


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:CHEN YU  
 Test Date:2017-03-16

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:9.410m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM  
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	lum, lamp
5	9266	9400	9499	9487	9553	9437	9289	9215	0- 5	225.6	225.6	1.05,1.05
10	9064	9316	9495	9255	9328	9357	9075	9018	5- 10	665.8	891.4	4.16,4.16
15	8964	9142	9170	8958	8977	9232	8857	8959	10- 15	1083	1974	9.21,9.21
20	8839	8840	8844	8630	8621	8849	8639	8826	15- 20	1465	3439	16.1,16.1
25	8592	8523	8466	8364	8220	8462	8350	8602	20- 25	1804	5243	24.5,24.5
30	8279	8128	8087	8014	7925	8011	8062	8216	25- 30	2091	7334	34.2,34.2
35	7804	7642	7488	7409	7417	7434	7476	7652	30- 35	2302	9636	45,45
40	7108	6981	6889	6667	6581	6740	6891	6979	35- 40	2401	12036	56.2,56.2
45	6103	5736	5521	5326	5255	5487	5690	5901	40- 45	2334	14370	67.1,67.1
50	4498	4363	4153	3825	3888	4032	4489	4557	45- 50	2001	16371	76.4,76.4
55	3105	3062	3113	2876	2561	2887	3354	3300	50- 55	1550	17920	83.6,83.6
60	2115	2092	2073	2030	1857	2045	2220	2301	55- 60	1170	19090	89.1,89.1
65	1465	1494	1512	1308	1256	1481	1648	1500	60- 65	849.9	19940	93.1,93.1
70	961.9	1044	951.1	886.3	862.9	1061	1077	999.6	65- 70	612.4	20552	95.9,95.9
75	610.5	661.9	668.0	610.5	545.0	695.0	783.0	729.8	70- 75	427.2	20980	97.9,97.9
80	295.1	332.2	384.8	291.0	234.3	405.2	489.2	449.7	75- 80	275.1	21255	99.2,99.2
85	46.13	104.2	194.0	76.70	26.15	174.5	258.1	199.0	80- 85	132.4	21387	99.8,99.8
90	1.693	4.071	3.083	5.151	2.672	8.484	26.90	14.99	85- 90	39.26	21426	100,100
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

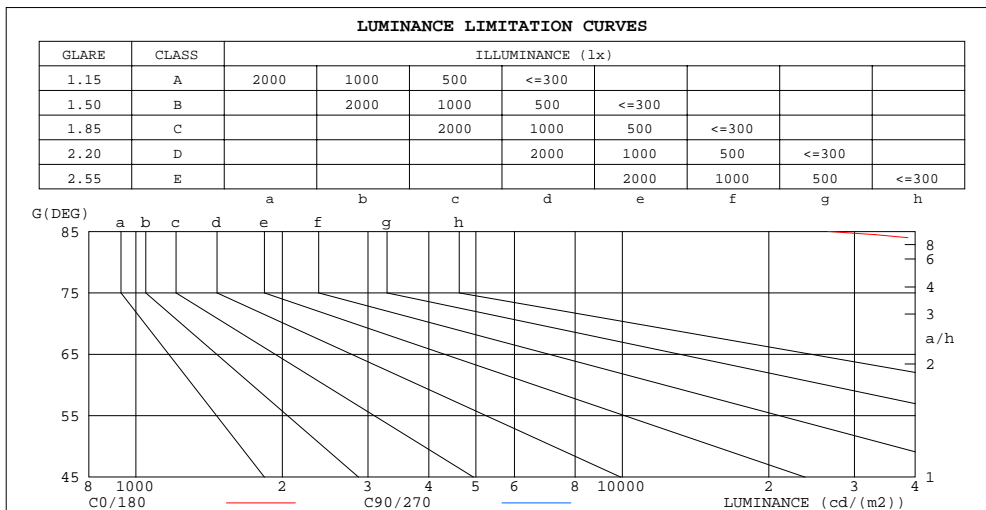

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	26462	111270
80	84972	110807
75	117931	129045
70	140621	139048
65	173359	178920
60	211478	207346
55	270697	271368
50	349912	323010
45	431531	390393


C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature:25DEG  
Operators:CHEN YU  
Test Date:2017-03-16

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.287  
Humidity:65.0%  
Test Distance:9.410m [K=1.0000]  
Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:221.0V I:0.7125A P:153.4W PF:0.9741 Lamp Flux:21426.4x1 lm		
NAME: LED HIGH BAY LIGHT	TYPE:YHL-ID-150-HB-VE	WEIGHT:
SPEC.:MEAN WELL	DIM.: 5000K	SERIAL No.:20170316
MFR.:	SUR.:70Ra	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.06	1.03	.00	1.04	1.01	.98	1.00	.97	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.87	.83	.89	.85	.81	.86	.83	.79	.83	.80	.77	.75
3.0	.85	.77	.72	.83	.76	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.60	.54	.67	.60	.54	.65	.59	.53	.64	.58	.53	.62	.57	.52	.50
6.0	.62	.54	.48	.61	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.48	.43	.54	.47	.42	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.51	.44	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.34	.44	.38	.34	.33
10.0	.44	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.31	.41	.35	.31	.30

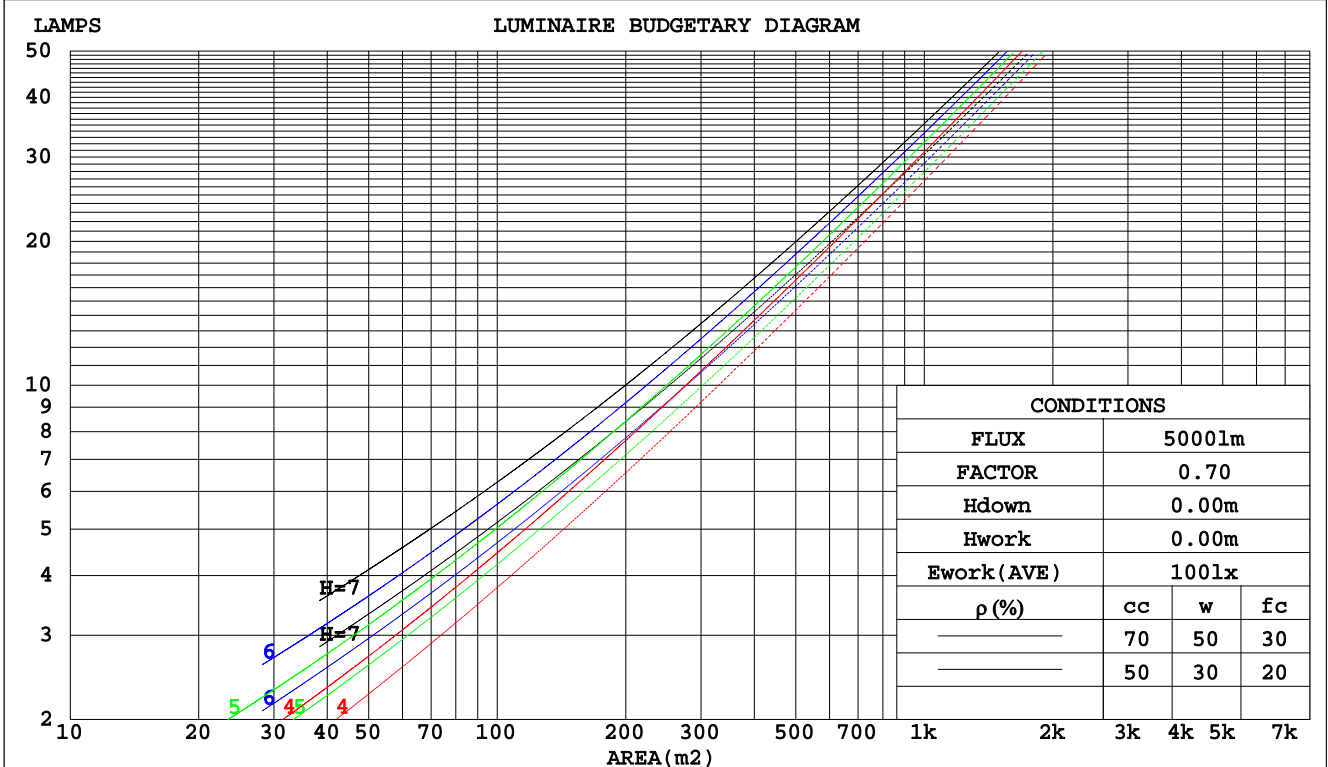

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:CHEN YU  
 Test Date:2017-03-16

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:9.410m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:221.0V I:0.7125A P:153.4W PF:0.9741 Lamp Flux:21426.4x1 lm		
NAME: LED HIGH BAY LIGHT	TYPE:YHL-ID-150-HB-VE	WEIGHT:
SPEC.:MEAN WELL	DIM.: 5000K	SERIAL No.:20170316
MFR.:	SUR.:70Ra	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.260	.148	.047	.253	.144	.046	.240	.138	.044	.228	.132	.042	.217	.126	.041	
2.0	.250	.137	.042	.244	.135	.041	.233	.130	.040	.223	.125	.039	.213	.120	.038	
3.0	.236	.126	.038	.231	.124	.037	.221	.120	.036	.212	.116	.036	.203	.113	.035	
4.0	.222	.115	.034	.217	.114	.034	.208	.110	.033	.200	.108	.032	.193	.105	.032	
5.0	.208	.106	.031	.204	.105	.030	.196	.102	.030	.189	.100	.030	.182	.097	.029	
6.0	.195	.098	.028	.192	.097	.028	.185	.095	.028	.178	.093	.027	.172	.091	.027	
7.0	.184	.091	.026	.180	.090	.026	.174	.088	.025	.168	.086	.025	.163	.085	.025	
8.0	.173	.084	.024	.170	.084	.024	.164	.082	.023	.159	.081	.023	.154	.079	.023	
9.0	.163	.079	.022	.161	.078	.022	.156	.077	.022	.151	.076	.022	.146	.074	.021	
10.0	.154	.074	.021	.152	.073	.020	.148	.072	.020	.143	.071	.020	.139	.070	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.177	.157	.138	.151	.134	.119	.104	.092	.082	.060	.053	.048	.019	.017	.015	
2.0	.167	.132	.103	.143	.114	.089	.098	.079	.062	.056	.046	.036	.018	.015	.012	
3.0	.158	.114	.079	.135	.098	.069	.093	.068	.048	.054	.040	.028	.017	.013	.009	
4.0	.150	.100	.062	.129	.087	.054	.089	.060	.038	.051	.035	.023	.016	.012	.007	
5.0	.143	.090	.050	.123	.078	.044	.084	.054	.031	.049	.032	.018	.016	.010	.006	
6.0	.136	.081	.042	.117	.070	.036	.081	.049	.026	.047	.029	.015	.015	.009	.005	
7.0	.130	.074	.035	.112	.064	.031	.077	.045	.022	.045	.027	.013	.014	.009	.004	
8.0	.124	.068	.030	.106	.059	.026	.074	.042	.019	.043	.025	.011	.014	.008	.004	
9.0	.118	.063	.026	.102	.055	.023	.070	.039	.016	.041	.023	.010	.013	.007	.003	
10.0	.113	.059	.023	.097	.051	.020	.067	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:CHEN YU  
 Test Date:2017-03-16

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:9.410m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.0V I:0.7125A P:153.4W PF:0.9741 Lamp Flux:21426.4x1 lm		
NAME: LED HIGH BAY LIGHT	TYPE:YHL-ID-150-HB-VE	WEIGHT:
SPEC.:MEAN WELL	DIM.: 5000K	SERIAL No.:20170316
MFR.:	SUR.:70Ra	PROTECTION ANGLE:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	31.9	33.3	32.2	33.5	33.7	31.9	33.3	32.2	33.5	33.7
3H	32.4	33.7	32.7	33.9	34.1	32.5	33.8	32.8	34.0	34.2
4H	32.6	33.7	32.9	34.0	34.2	32.7	33.9	33.0	34.2	34.4
6H	32.6	33.7	32.9	34.0	34.3	32.9	34.0	33.2	34.3	34.6
8H	32.6	33.7	32.9	34.0	34.2	33.0	34.0	33.3	34.3	34.6
12H	32.6	33.6	32.9	33.9	34.2	33.0	34.0	33.3	34.3	34.6
4H 2H	32.1	33.3	32.4	33.6	33.8	32.1	33.3	32.4	33.6	33.8
3H	32.8	33.8	33.1	34.1	34.4	32.9	33.9	33.2	34.2	34.5
4H	33.0	33.9	33.4	34.3	34.6	33.2	34.2	33.6	34.5	34.8
6H	33.2	34.0	33.5	34.3	34.7	33.5	34.3	33.9	34.7	35.0
8H	33.2	33.9	33.6	34.3	34.7	33.6	34.4	34.0	34.7	35.1
12H	33.1	33.8	33.5	34.2	34.6	33.7	34.4	34.1	34.8	35.2
8H 4H	33.1	33.9	33.5	34.2	34.6	33.3	34.1	33.7	34.4	34.8
6H	33.3	33.9	33.7	34.3	34.8	33.7	34.3	34.1	34.7	35.1
8H	33.3	33.9	33.8	34.3	34.8	33.8	34.4	34.3	34.8	35.3
12H	33.3	33.8	33.8	34.2	34.7	34.0	34.5	34.5	34.9	35.4
12H 4H	33.1	33.8	33.5	34.2	34.6	33.3	34.0	33.7	34.4	34.8
6H	33.3	33.9	33.8	34.3	34.7	33.7	34.2	34.1	34.6	35.1
8H	33.3	33.8	33.8	34.3	34.7	33.8	34.3	34.3	34.8	35.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.8 / - 0.7					+ 0.6 / - 0.6				
1.5H	+ 0.6 / - 0.5					+ 0.3 / - 0.4				
2.0H	+ 1.8 / - 1.5					+ 1.2 / - 1.0				

CIE Pub.117 Corrected 21426 lm Total Lamp Luminous Flux.(8log(F/F0) = 10.6)

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:CHEN YU  
 Test Date:2017-03-16

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:9.410m [K=1.0000]  
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.0V I:0.7125A P:153.4W PF:0.9741 Lamp Flux:21426.4x1 lm		
NAME: LED HIGH BAY LIGHT	TYPE:YHL-ID-150-HB-VE	WEIGHT:
SPEC.:MEAN WELL	DIM.: 5000K	SERIAL No.:20170316
MFR.:	SUR.:70Ra	PROTECTION ANGLE:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	54	47	63	53	47	62	53	47	41
0.80	74	64	57	73	64	57	72	63	57	51
1.00	82	73	67	81	72	66	79	73	66	60
1.25	89	80	74	88	80	74	85	78	73	67
1.50	94	85	80	92	85	79	89	83	78	71
2.00	100	92	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	105	100	95	103	98	94	100	95	92	84
4.00	109	104	100	106	102	99	102	99	96	88
5.00	111	107	103	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:CHEN YU  
 Test Date:2017-03-16

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:9.410m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**


Test:U:221.0V I:0.7125A P:153.4W PF:0.9741 Lamp Flux:21426.4x1 lm		
NAME: LED HIGH BAY LIGHT	TYPE:YHL-ID-150-HB-VE	WEIGHT:
SPEC.:MEAN WELL	DIM.: 5000K	SERIAL No.:20170316
MFR.:	SUR.:70Ra	PROTECTION ANGLE:

Conical surface Flux(90deg):

14370 lm  
%lum = 67.1%  
%lamp = 67.1%

Conical surface Flux(70deg):

19090 lm  
%lum = 89.1%  
%lamp = 89.1%

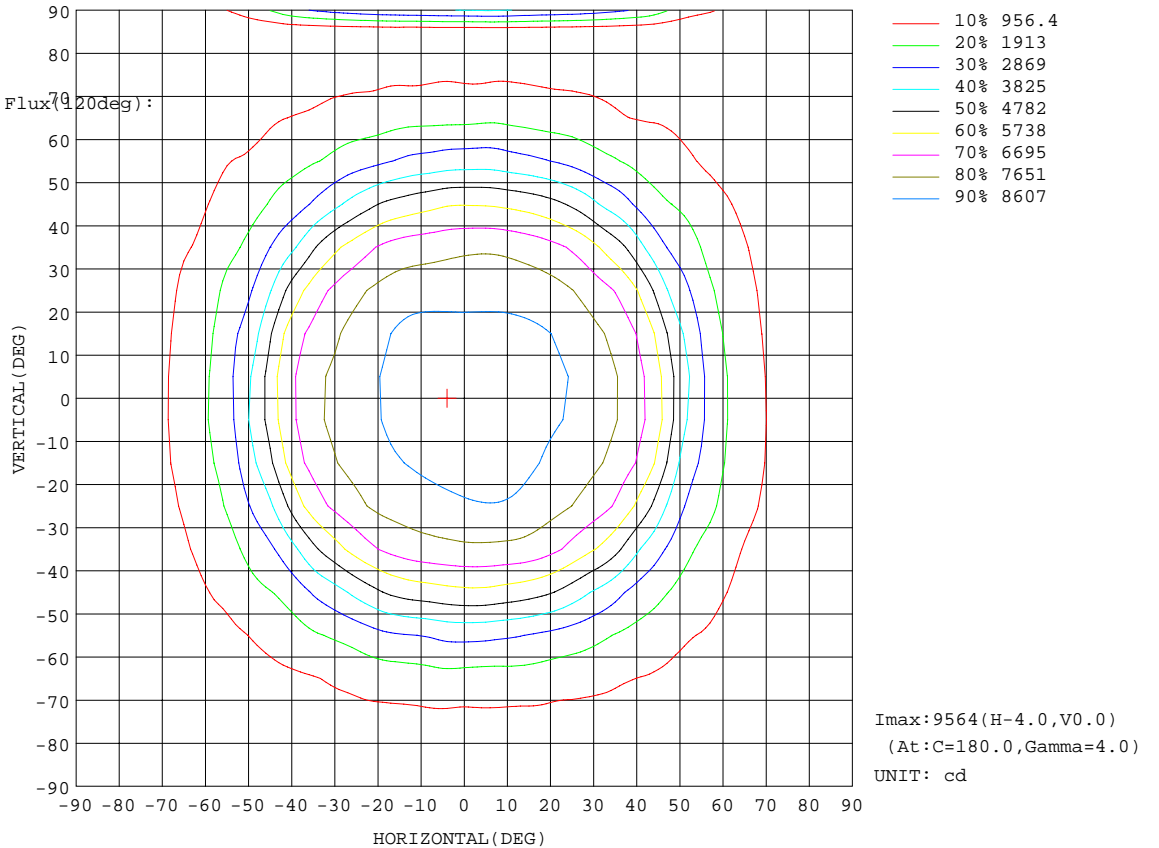


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: CHEN YU  
 Test Date: 2017-03-16

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.287  
 Humidity: 65.0%  
 Test Distance: 9.410m [K=1.0000]  
 Remarks:

**AAI Figure**

Test:U:221.0V I:0.7125A P:153.4W PF:0.9741 Lamp Flux:21426.4x1 lm		
NAME: LED HIGH BAY LIGHT	TYPE:YHL-ID-150-HB-VE	WEIGHT:
SPEC.:MEAN WELL	DIM.: 5000K	SERIAL No.:20170316
MFR.:	SUR.:70Ra	PROTECTION ANGLE:

Flux out:15624 lm

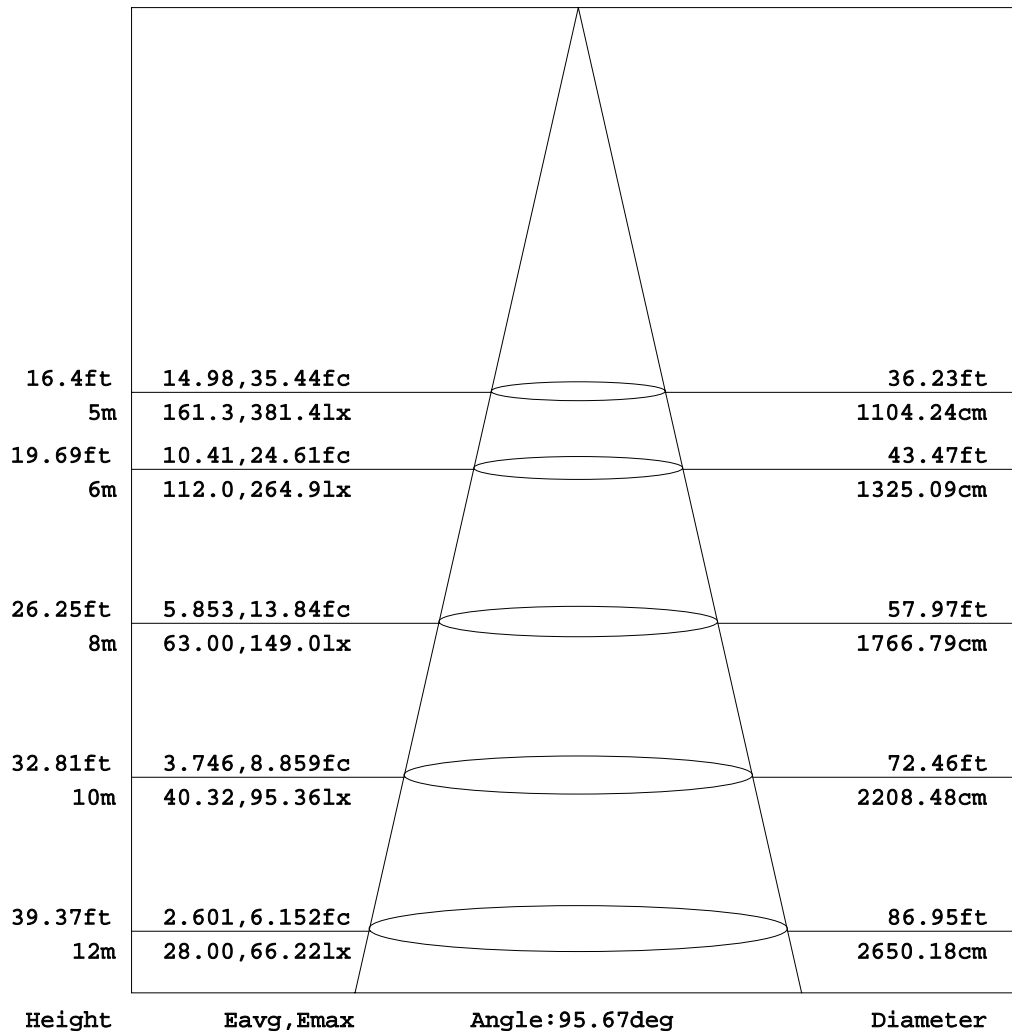

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:CHEN YU  
 Test Date:2017-03-16

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:9.410m [K=1.0000]  
 Remarks:



**ISOLUX DIAGRAM**


Test:U:221.0V I:0.7125A P:153.4W PF:0.9741 Lamp Flux:21426.4x1 lm		
NAME: LED HIGH BAY LIGHT	TYPE:YHL-ID-150-HB-VE	WEIGHT:
SPEC.:MEAN WELL	DIM.: 5000K	SERIAL No.:20170316
MFR.:	SUR.:70Ra	PROTECTION ANGLE:

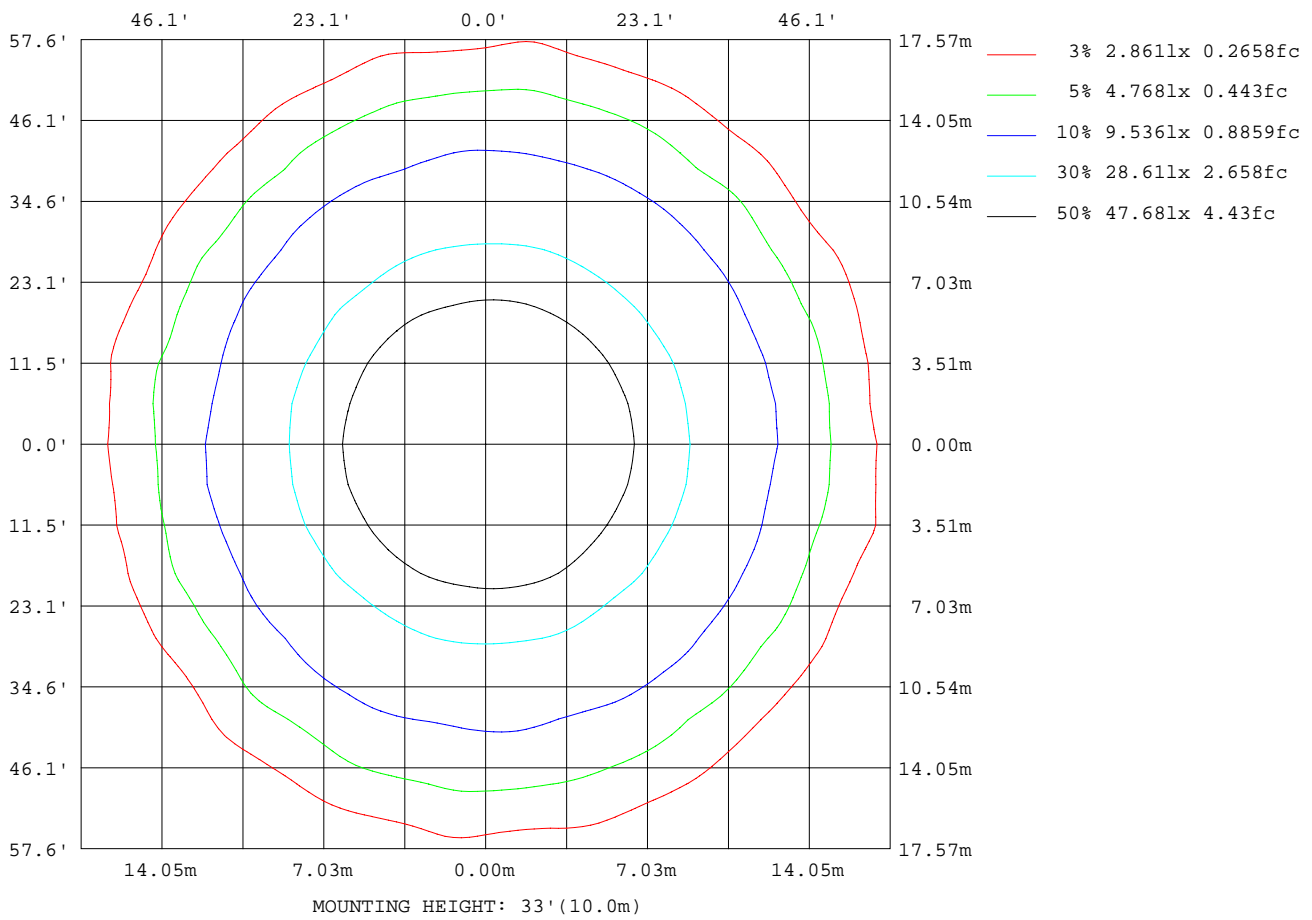

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:CHEN YU  
 Test Date:2017-03-16

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:9.410m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

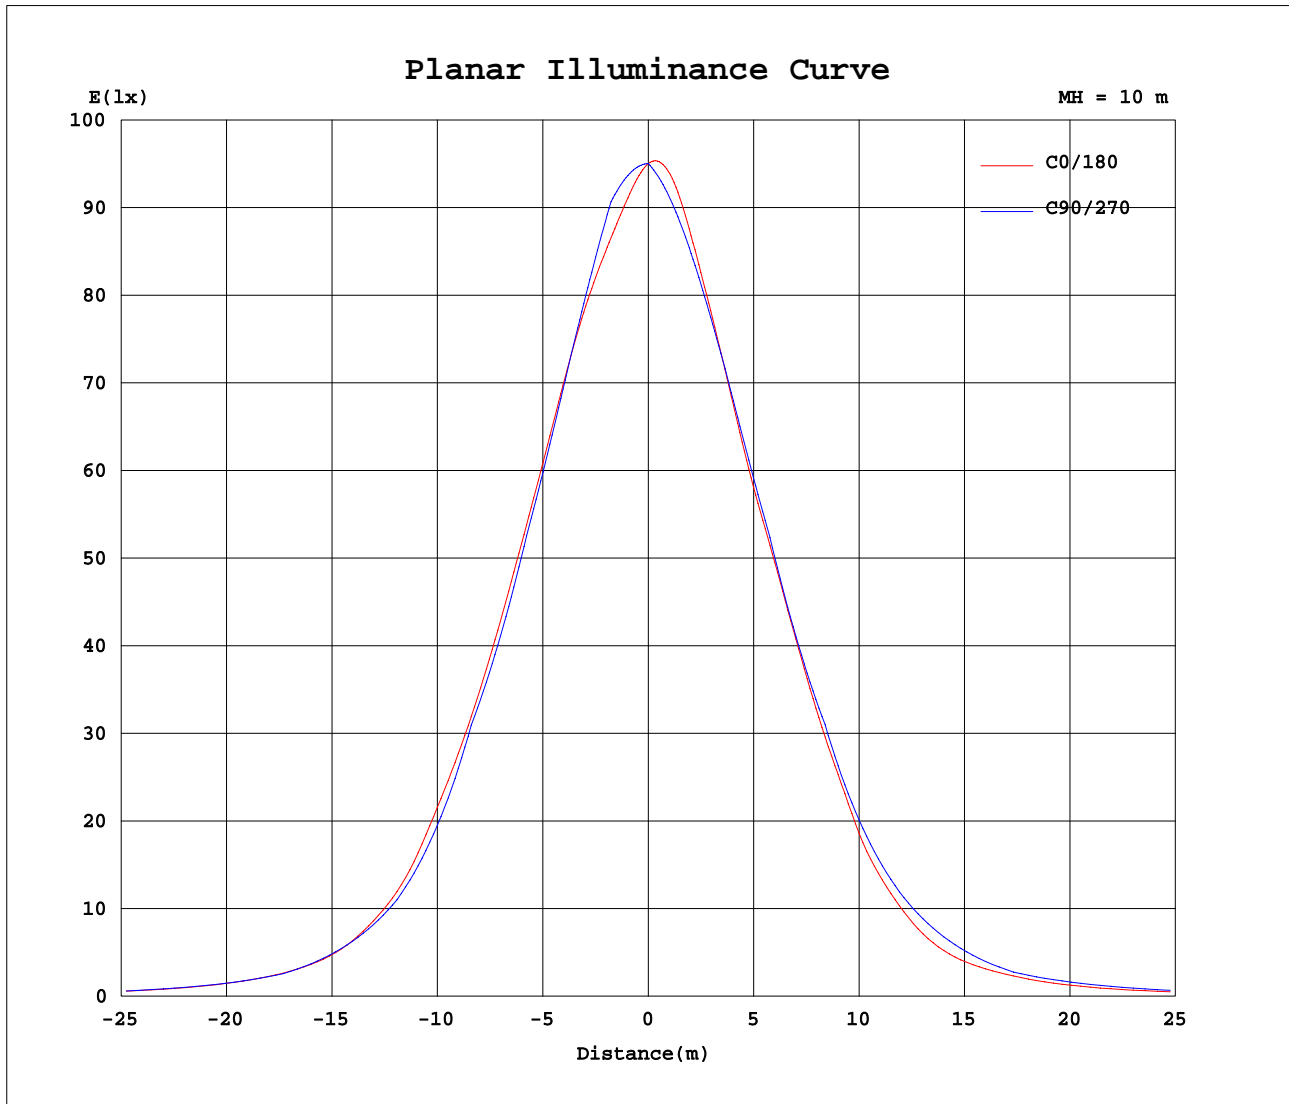

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: CHEN YU  
 Test Date: 2017-03-16

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.287  
 Humidity: 65.0%  
 Test Distance: 9.410m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.0V I:0.7125A P:153.4W PF:0.9741 Lamp Flux:21426.4x1 lm		
NAME: LED HIGH BAY LIGHT	TYPE:YHL-ID-150-HB-VE	WEIGHT:
SPEC.:MEAN WELL	DIM.: 5000K	SERIAL No.:20170316
MFR.:	SUR.:70Ra	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	9504	9504	9504	9504	9504	9504	9504	9504	9504	9504	9504	9504	9504	9504	9504	9504	9504	9504	9504
5	9266	9275	9287	9300	9315	9330	9347	9365	9382	9400	9417	9433	9448	9462	9473	9483	9490	9495	9499
10	9064	9077	9092	9112	9135	9162	9195	9232	9272	9316	9359	9400	9439	9473	9497	9513	9518	9511	9495
15	8964	8954	8948	8948	8956	8974	9003	9044	9099	9142	9179	9213	9240	9256	9260	9251	9231	9203	9170
20	8839	8801	8770	8748	8734	8733	8743	8760	8793	8840	8897	8956	9004	9032	9030	9003	8955	8899	8844
25	8592	8558	8533	8518	8506	8476	8450	8448	8472	8523	8601	8651	8678	8682	8664	8625	8576	8522	8466
30	8279	8237	8216	8216	8195	8144	8114	8110	8125	8128	8156	8199	8238	8251	8234	8205	8174	8137	8087
35	7804	7756	7743	7751	7683	7646	7637	7612	7609	7642	7700	7772	7742	7706	7645	7580	7535	7508	7488
40	7108	7065	7079	7048	7002	7013	6961	6948	6975	6981	6881	6882	6934	6981	6971	6910	6870	6865	6889
45	6103	6062	6146	6055	6092	5944	5894	6056	5899	5736	5697	5801	5899	5849	5734	5616	5575	5562	5521
50	4498	4335	4315	4338	4383	4362	4332	4345	4339	4363	4347	4364	4381	4302	4165	4119	4189	4248	4153
55	3105	3045	2986	2933	2948	2969	3025	2939	2972	3062	3037	2990	3052	3077	3053	3079	3089	3111	3113
60	2115	2116	2221	2190	2081	2040	2123	2117	2093	2092	2126	2179	2193	2157	2181	2198	2060	1976	2073
65	1465	1395	1378	1361	1412	1362	1383	1388	1488	1494	1498	1531	1524	1488	1543	1576	1518	1478	1512
70	962	988	973	905	938	988	980	981	1049	1044	1042	1093	1077	1043	1035	1007	1000	995	951
75	610	575	551	611	610	591	619	638	656	662	668	701	695	694	700	688	693	719	668
80	295	281	289	293	290	311	298	327	323	332	344	360	377	386	410	405	398	445	385
85	46.1	41.0	47.4	44.4	60.5	55.6	32.8	52.4	81.1	104	129	147	169	182	200	202	198	224	194
90	1.69	4.91	6.07	6.35	5.12	4.44	4.20	3.78	4.00	4.07	4.13	4.05	4.04	3.90	3.79	3.71	3.55	3.19	3.08

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:CHEN YU  
 Test Date:2017-03-16

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:9.410m [K=1.0000]  
 Remarks:





